


# ACROLINK

99.99999% Cu Stressfree Interconnect cable

## 7N-A2110III

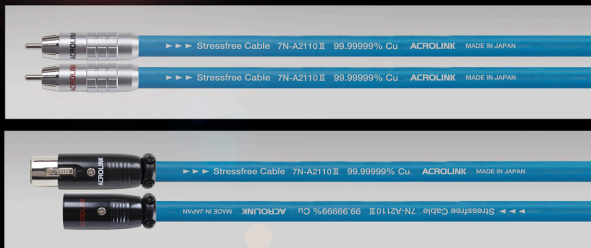

<b>Conductor:</b>	<i>D.U.C.C Stressfree 7N Cu 0.18<math>\phi</math> x 34 strands</i>
<b>Insulation</b>	<i>High molecule polyolefin</i>
<b>Inner sleeve:</b>	<i>Firm polyolefin resin</i>
<b>Shielding:</b>	<i>Copper foil + double layer 4N5 OFC parallel shielding</i>
<b>Outer sleeve:</b>	<i>High molecule polyolefin</i>
<b>Conductor resistance:</b>	<i>29m<math>\Omega</math>/m</i>
<b>Electrostatic capacitance:</b>	<i>59pF/m</i>
<b>Cable diameter:</b>	<i>9.0mm</i>

### RCA plug

<b>Center contact pin:</b>	<i>Hollow shaped Tellurium copper</i>
<b>Cold side:</b>	<i>Phosphorus copper</i>
<b>Plating:</b>	<i>Direct rhodium plating</i>
<b>Outer cover:</b>	<i>Brass machined out from solid material</i>

### XLR connector

<b>Male side contact pin:</b>	<i>Brass machined out from solid material</i>
<b>Female side contact pin:</b>	<i>Beryllium copper</i>
<b>Plating:</b>	<i>Direct rhodium plating</i>
<b>Outer body:</b>	<i>Zinc</i>

★Standard length for RCA is 0.6m, 1.0m, 1.5m and 1.0m, 1.5m for XLR