

# FURUTECH

PURE TRANSMISSION



## High End Performance Duplex UK Wall Sockets



### FP-1363-D NCF (R)

Type: 2-pole+earth

Rating: 13A 250V A.C.

*Furutech's Top-Tier FP-1363-D NCF (R) Wall Socket*

*Refinement has a New Name...*

*Nano Crystal<sup>2</sup> Formula - Nano Crystalline, Ceramic and Carbon Powder*

*Incorporated into select Furutech products, Nano Crystal<sup>2</sup> Formula --- NCF is comprised of a special crystalline material that has two "active" properties. First, it generates negative ions that eliminate static and secondly, it converts thermal energy into far-infrared. Furutech then combines this remarkable crystalline material with nano-sized ceramic particles and carbon powder for their additional "Piezo Effect" damping properties. The resulting Nano Crystal<sup>2</sup> Formula is the ultimate electrical and mechanical damping material – only found in Furutech products!*

The Pure Transmission Mission



The FP-1363-D NCF (R) manifests a devotion to best performance in every element of AC and signal transfer. Considering that what you actually hear is in a very real sense the direct product of the incoming AC then the final few feet are of prime importance for best performance.

Of course everyone would love to make pure-copper receptacles, but its malleability – lack of stiffness –

makes pure copper a poor choice. That's why you'll find phosphor bronze or brass in most receptacles. Furutech's intense engineering scrutiny has resulted in an industry-first, a technique allowing us to use special Furutech rhodium-plated  $\alpha$  (Alpha) pure copper conductors. But what really sets the FP-1363-D NCF (R) wall socket apart is "NCF" – Furutech's ultimate damping material - Nano Crystal<sup>2</sup> Formula eliminates static, "interconverts" thermal, mechanical and electrical energy and damps vibrations. The FP-1363-D NCF (R) can be summed up in a word; virtuoso!

*Features:*

- $\alpha$  (Alpha) Pure copper main Conductor (t : 1.2 mm)
- Cover material: Poly carbonate cover
- Chassis plate material: The special grade aluminum front plate (t:10mm)
- Body material: Nylon/fiberglass with a special anti-resonance nano-sized crystalline, piezo ceramic particles and carbon damping material "NCF"
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 152.0mm (L) x 86.0mm (W) x 25.0mm(H)
- Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see below) that increases the contact area of the Alpha Conductors.

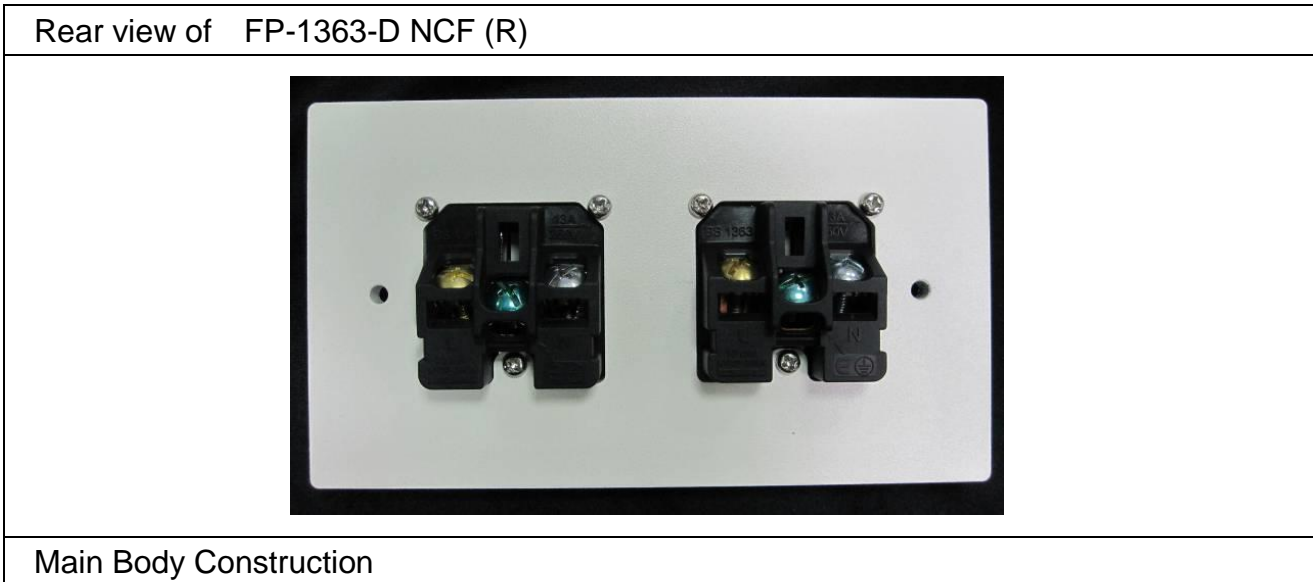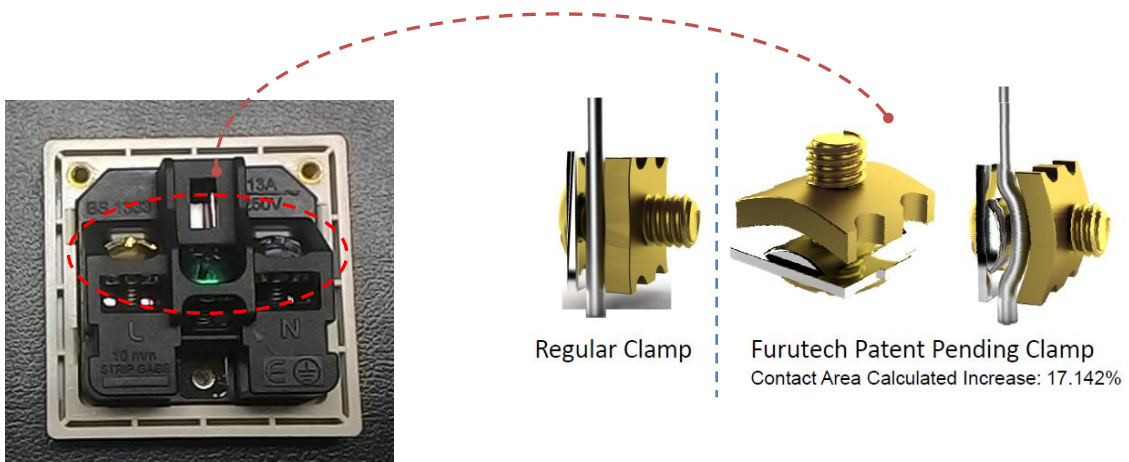



All metallic parts are treated with the  
*\*FURUTECH  $\alpha$  (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

FURUTECH CO., LTD      service@furutech.com

*Make A More Powerful Connection with Furutech!*

Product name	Product Introduction	JAN CODE
FP-1363-D NCF (R)	High End Performance Duplex UK Wall Sockets	